
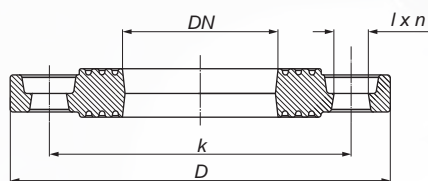


Adaptive flange FKA 4/8 PN 10


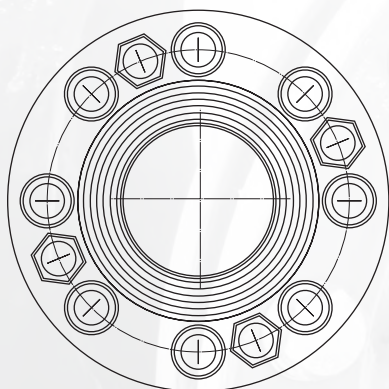


Coating: bitumen paint,
poliester paint min. 250 μm
Material: cast iron EN-GJL-250, PN-EN 1561:2012
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0 MPa; PN 10

It is used to install supply fittings in a situation of incompatible number of holes on the connected flanges DN 80.

DN	K	D	l	n	Weight
80	160	200	18	4/8	3,00

Adaptive flange FKA 4/8 ductile iron PN 10/16

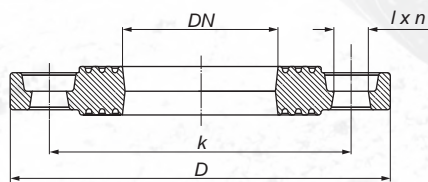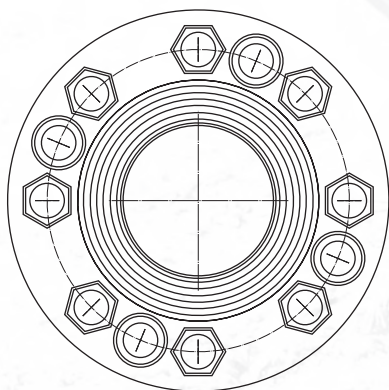

Coating: poliester paint min. 250 μm
Material: ductile iron, EN-GJS-500-7, PN-EN 1563:2018
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0/1,6 MPa; PN 10/16

It is used to install supply fittings in a situation of incompatible number of holes on the connected flanges DN 80.

DN	K	D	l	n	Weight
80	160	200	18	4/8	3,00