


RKF Compensate adaptor ductile iron PN 10/16

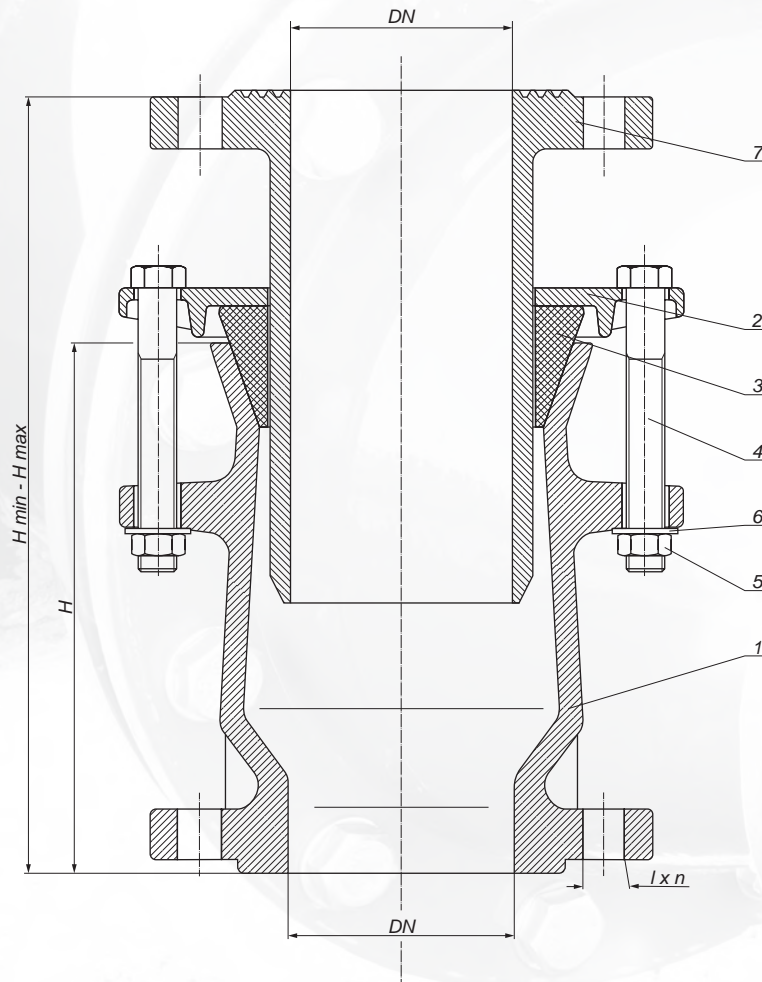

Coating: poliester paint min. 250 μm
 Flange connection: PN-EN 1092-2:1999
 Nominal pressure: 1,0/1,6 MPa, PN 10/16

It is used for installation of fittings on the supply network.

No.	Description	Material
1.	Body	EN-GJS-500-7
2.	Ring	EN-GJS-500-7
3.	Gasket	EPDM/NBR
4.	Screw	Galvanized steel 8.8 class/ Stainless steel A2/A4
5.	Nut	
6.	Pad	
7.	Flanged pipe	EN-GJS-500-7

DN	H min.	H max.	l	n	Weight:
80	220	270	18	8	13,40
100	230	280	18	8	16,50
150	250	300	22	8	26,90
200	275	325	22	8(12)	39,20
250	275	330	24	12	42,50
300	275	360	24	12	61,50