


Bare tee TBK PN 10

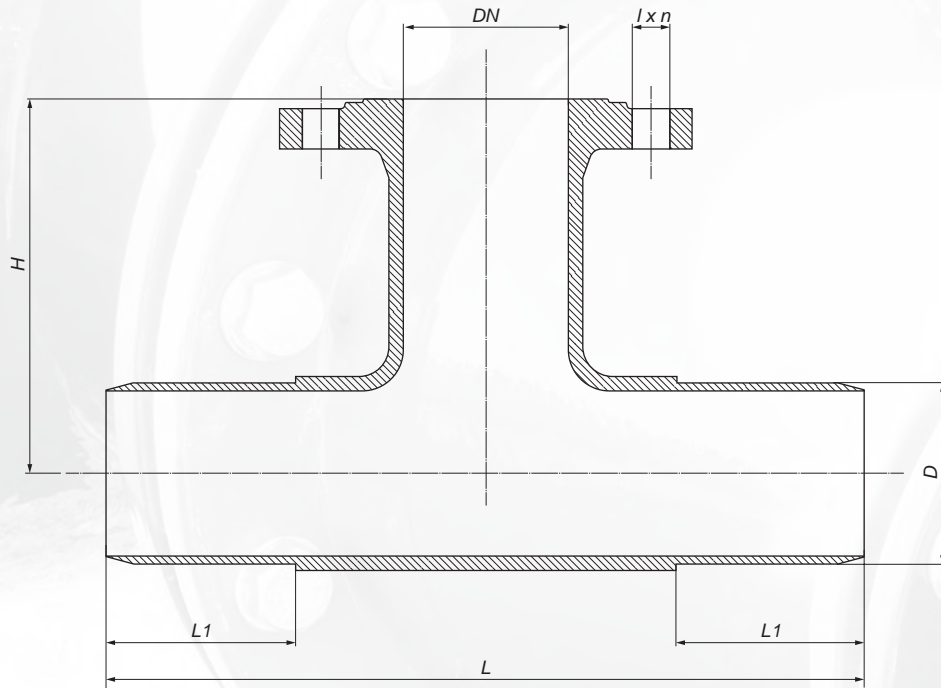

It is used to branch and mount fittings on the supply network.

D	DN	L	H	L1	l	n	Weight
90	50	300	160	110	18	4	7,60
	80	310	165	110	18	4(8)	10,10
110	50	360	170	110	18	4	9,20
	80	360	175	110	18	4(8)	11,60
	100	360	180	110	18	8	14,00
160	80	445	205	120	22	4(8)	18,00
	100	445	210	120	22	8	20,00
	150	455	220	120	22	8	25,00
225	80	450	235	150	22	4(8)	29,00
	100	450	240	150	22	8	31,00
	150	450	245	150	22	8	37,00

Coating: bitumen paint,
poliester paint min. 250 μm
Material: cast iron EN-GJL-250, PN-EN 1561:2012
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0 MPa; PN 10