


## Single flanged pipe F PN 10 and ductile iron PN 10/16

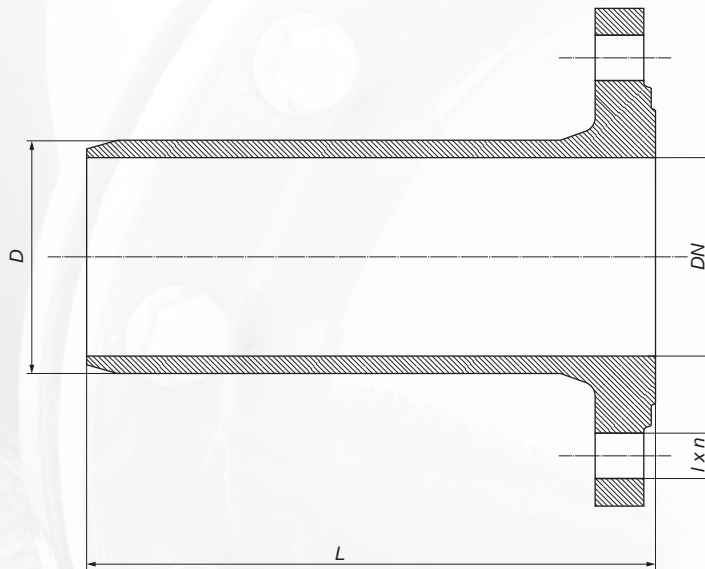

Coating: bitumen paint, epoxy paint min. 250  $\mu\text{m}$   
 Material: ductile iron pipe EN-GJS-500-7, PN-EN 1563:2000  
 Flange: EN-GJL-250, PN-EN 1561:2000,  
 EN-GJS-500-7, PN-EN 1563:2000  
 Flange connection: PN-EN 1092-2:1999  
 Nominal pressure: 1,0 MPa; PN 10

DN	L	l	n	Weight	
				L-400	$\pm 100$ mm
80	300, 400, 500	18	8	12,00	0,90
100		18	8	16,00	1,50
150		22	8	22,00	3,20
200		22	8	34,00	5,00

Possibility to make length L according to the order.

It is used to connect cast iron pipes with flanged fitting.

Coating: epoxy paint min. 250  $\mu\text{m}$   
 Material: ductile iron EN-GJS-500-7, PN-EN 1563:2000  
 Flange connection: PN-EN 1092-2:1999  
 Nominal pressure: 1,0/1,6 MPa, PN 10/16

DN	D	L	l	n	Weight
50	66	340	18	4	7,50
65	82	345	18	4	9,50
80	98	350	18	8	7,80
100	118	360	18	8	9,70
125	144	370	18	8	12,50
150	170	380	22	8	15,80
200	222	400	22	8(12)	22,80
250	274	420	22(26)	12	32,00(36,00)
300	326	440	22(26)	12	43,50(48,00)

Possibility to make length L according to the order.