


Flanged bend Q PN 10 and ductile iron PN 10/16

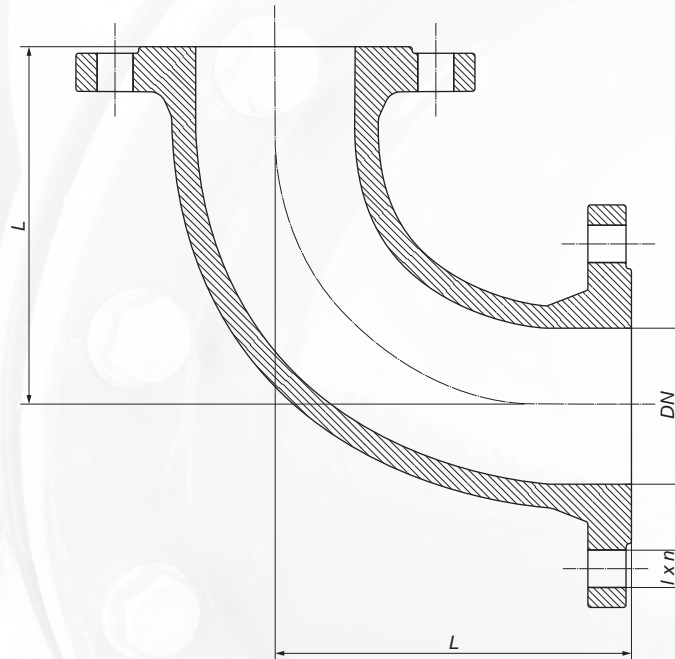

It is used to turn the course of supply systems.

Coating: poliester paint min. 250 μ m
Material: ductile iron, EN-GJS-500-7, PN-EN 1563:2018
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0/1,6 MPa; PN 10/16

Coating: bitumen paint,
poliester paint min. 250 μ m
Material: cast iron EN-GJL-250, PN-EN 1561:2012
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0 MPa; PN 10

DN	L	l	n	Weight
50	150	18	4	6,70
80	165	18	4(8)	12,20
100	190	18	8	16,20
150	220	22	8	28,00
200	260	22	8	52,00

DN	L	l	n	Weight
50	150	18	4	8,00
65	160	18	4	8,80
80	165	18	8	9,70
100	180	18	8	11,90
125	200	18	8	17,00
150	220	22	8	21,00
200	260	22	8(12)	33,60
250	350	22(26)	12	52,00
300	400	22(26)	12	72,00