


## Flanged reducer FFR PN 10 and ductile iron PN 10/16

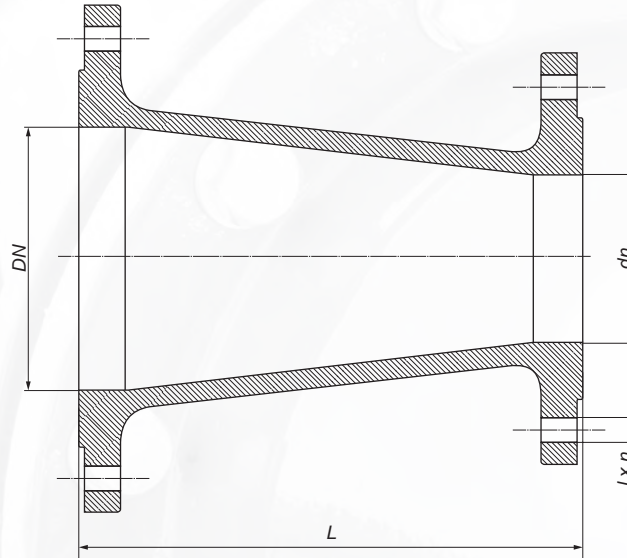

It is used to reduce diameter in supply systems.

Coating: poliester paint min. 250  $\mu$ m  
Material: ductile iron, EN-GJS-500-7, PN-EN 1563:2018  
Flange connection: PN-EN 1092-2:1999  
Nominal pressure: 1,0/1,6 MPa; PN 10/16

Coating: bitumen paint,  
poliester paint min. 250  $\mu$ m  
Material: cast iron EN-GJL-250, PN-EN 1561:2012  
Flange connection: PN-EN 1092-2:1999  
Nominal pressure: 1,0 MPa; PN 10

DN	dn	L	l	n	Weight
80	50	200	18	4(8)/4	7,70
100	50	200	18	8/4	9,00
	80	200	18	8/4(8)	11,50
150	80	200	22	8/4(8)	15,00
	100	200	22	8	16,00
200	80	200	22	8/4(8)	20,50
	100	200	22	8	21,50
	150	200	22	8	22,50

DN	Dn	L	l	n	Weight
65	50	200	18	4	6,90
80	50	200	18	8/4	8,40
	65	200	18	8/4	8,80
100	50	200	18	8/4	9,40
	65	200	18	8/4	9,80
	80	200	18	8	10,20
125	80	200	18	8	13,00
	100	200	18	8	13,40
150	80	200	22	8	14,60
	100	200	22	8	14,80
	125	200	22	8	17,20
200	80	300	22	8(12)/8	22,20
	100	300	22	8(12)/8	22,50
	125	300	22	8(12)/8	23,20
	150	300	22	8(12)/8	23,70
250	80	300	22(26)	12/8	27,10
	100	300	22(26)	12/8	28,30
	150	300	22(26)	12/8	29,50
	200	300	22(26)	12/8(12)	33,00
300	100	300	22(26)	12/8	31,30
	150	300	22(26)	12/8	36,70
	200	300	22(26)	12/8(12)	45,00
	250	300	22(26)	12	50,00