


## Flanged cross TT ductile iron PN 10/16

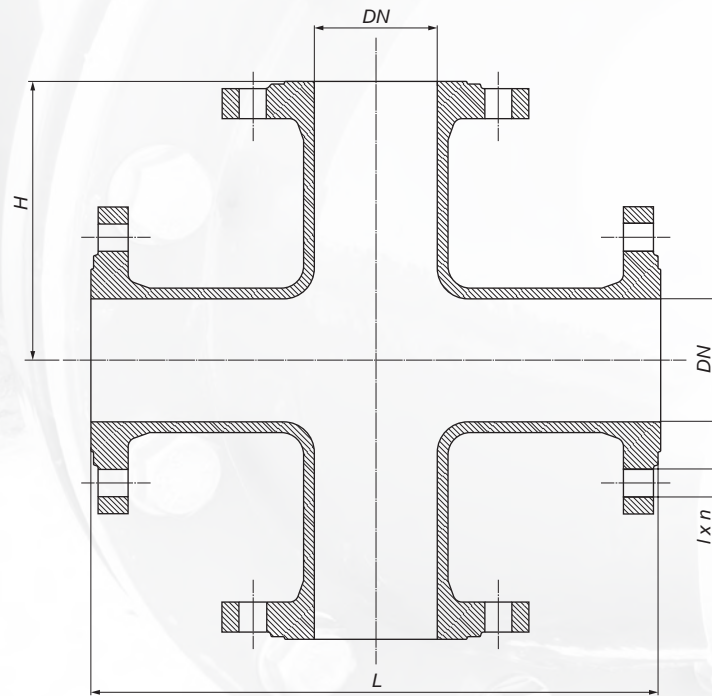

*It is used to branch and mount fittings  
on the supply network.*

Coating: poliester paint min. 250  $\mu\text{m}$   
Material: ductile iron, EN-GJS-500-7, PN-EN 1563:2018  
Flange connection: PN-EN 1092-2:1999  
Nominal pressure: 1,0/1,6 MPa; PN 10/16

DN	L	l	n	H	Weight
80	330	18	8	165	20,00
100	360	18	8	180	26,00
150	440	22	8	220	42,00
200	520	22	8(12)	260	64,00