


Spotting drill NZ for PE and PVC pipes ductile iron PN 10/16

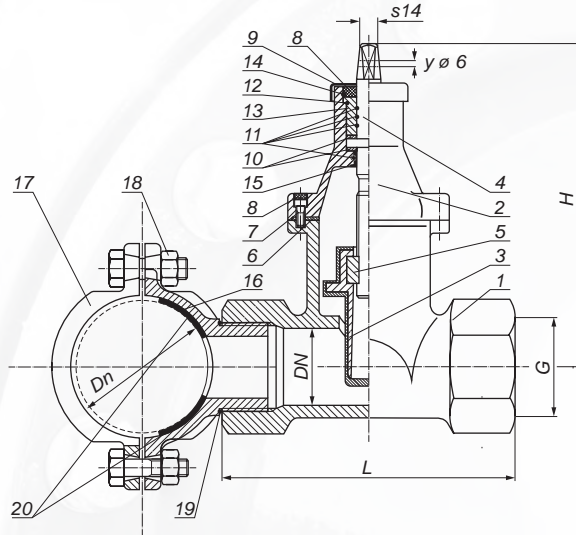

No.	Description	Pcs.	Material
1.	Body	1	EN-GJS-500-7
2.	Cover	1	EN-GJS-500-7
3.	Rubberized wedge	1	EN-GJS-500-7/Brass MO59/EPDM/NBR
4.	Spindle	1	Stainless steel 2H13
5.	Nut	1	Brass MO59
6.	Cover gasket	1	EPDM/NBR
7.	Allen screw	4	Galvanized steel 8.8 class/ Stainless steel A2
8.	Screw shield	5	Glue/paraffin
9.	Spindle shield	1	EPDM/NBR
10.	Bearing	2	Tarnamid
11.	Spindle O-ring	4	EPDM/NBR
12.	Choke O-ring	1	EPDM/NBR
13.	Choke	1	Brass MO59
14.	Protection ring	1	Special steel
15.	Locking sleeve	1	Tarnamid
16.	Upper saddle	1	EN-GJS-500-7
17.	Lower saddle	1	EN-GJS-500-7
18.	Screw, pad, nut	4	Galvanized steel 8.8 class/ Stainless steel A2/A4
19.	Saddle O-ring	1	EPDM/NBR
20.*	Saddle gasket	1	EPDM/NBR

* It is possible to make a clamp with full rubber lining.

It is used for connecting home installations to the water supply network made of PE and PVC pipes and shutting off the flow. Indentation on an active water supply must be made using a drilling device. Option to exchange O-rings under pressure on a working pipeline.

Medium: non-aggressive liquids with a temperature up to 70°C
Coating: poliester paint min. 250 µm
Nominal pressure: 1,0/1,6 MPa; PN 10/16

Dn	G	DN	L	H	Weight
63	5/4"	32	120	170	4,70
90			120	170	5,70
110			120	170	5,90
125			120	170	6,30
160			120	170	7,70
225	120	170	9,10		
63	6/4"	40	120	170	4,60
90			120	170	5,60
110			120	170	5,80
125			120	170	6,20
160			120	170	7,60
225	120	170	9,00		
90	2"	50	185	215	10,00
110			185	215	10,20
125			185	215	10,60
160			185	215	12,00
225			185	215	13,40