


Service valve PN 10

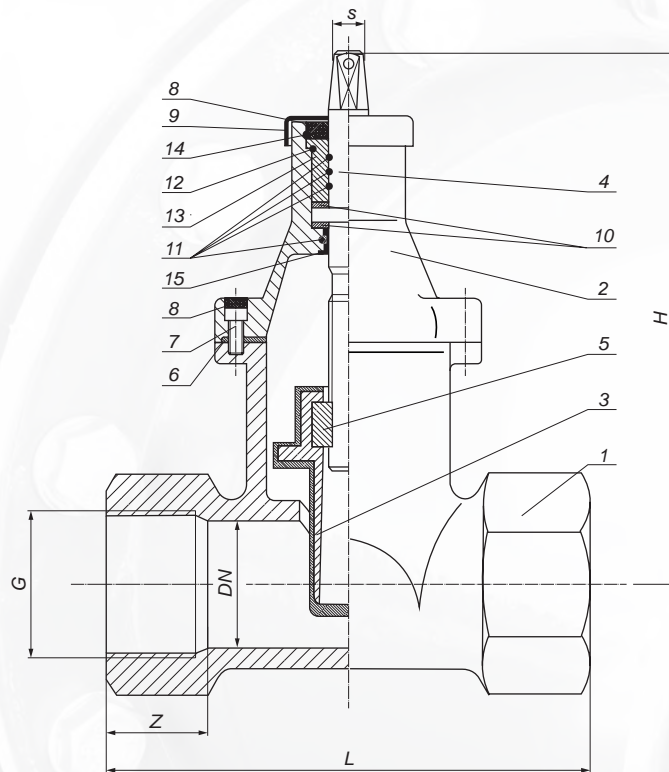

| No. | Description | Pcs. | Material |
|-----|------------------|------|---|
| 1. | Body | 1 | EN-GJL-250 |
| 2. | Cover | 1 | EN-GJL-250 |
| 3. | Rubberized wedge | 1 | EN-GJS-500-7/Brass MO59/ EPDM/NBR |
| 4. | Spindle | 1 | Stainless steel 2H13 |
| 5. | Nut | 1 | Brass MO59 |
| 6. | Cover gasket | 1 | EPDM/NBR |
| 7. | Allen screw | 4 | Galvanized steel 8.8 class/ Stainless steel A2 |
| 8. | Screw shield | 5 | Glue/paraffin |
| 9. | Spindle shield | 1 | EPDM/NBR |
| 10. | Bearing | 2 | Tarnamid |
| 11. | Spindle O-ring | 4 | EPDM/NBR |
| 12. | Choke O-ring | 1 | EPDM/NBR |
| 13. | Choke | 1 | Brass MO59 |
| 14. | Protection ring | 1 | Special steel |
| 15. | Locking sleeve | 1 | Tarnamid |

It is used to cut off flow of chemically inert liquids of temperature up to 70°C in pipelines and installations.

Coating: poliester paint min. 250 µm
Nominal pressure: 1,0 MPa; PN 10
Requirements and inspection according to PN-EN 1074-1,2:2002
Threaded socket: PN-EN 10226-1:2006

Option to exchange O-rings under pressure on a working pipeline.

| DN | G | L | H | s | z | Weight |
|-----|------|-----|-----|----|----|--------|
| 20* | 3/4" | 100 | 120 | 14 | 20 | 1,20 |
| 25* | 1" | 100 | 120 | 14 | 20 | 1,20 |
| 32 | 5/4" | 120 | 170 | 14 | 20 | 2,90 |
| 40 | 6/4" | 120 | 170 | 14 | 20 | 2,80 |
| 50 | 2" | 185 | 215 | 14 | 20 | 7,30 |

* cover screwed into the body of the gate valve