


Overground hydrant DN 100 PN 10 and ductile iron PN 10/16

| No. | Description | Pcs. | Material |
|-----|------------------|------|---------------------------------------------------------|
| 1. | Knob | 1 | EN-GJL-250/EN-GJS-500-7 |
| 2. | Safety ring | 1 | EN-GJL-250/EN-GJS-500-7 |
| 3. | Chamber | 1 | EN-GJL-250/EN-GJS-500-7 |
| 4. | Piston | 1 | EN-GJS-500-7/EPDM/NBR |
| 5. | Gasket | 3 | EPDM/NBR |
| 6. | Sliding spindle | 1 | Stainless steel A2/1.4301 Steel P235 |
| 7. | Rivet | 2 | Steel St 2/Steel C1006 |
| 8. | Column | 1 | Stainless steel A2/1.4301 Steel P235 EN-GJS-500-7 |
| 9. | Nut casing | 1 | EN-GJS-500-7 |
| 10. | Head | 1 | EN-GJL-250/EN-GJS-500-7 |
| 11. | Nut | 1 | Brass MO59 |
| 12. | Cap | 2 | Aluminium AK11 |
| 13. | Cover gasket | 2 | EPDM/NBR |
| 14. | Cover | 2 | EN-GJL-250/EN-GJS-500-7 AK11/Polyethylene |
| 15. | Cord | 1 | Steel |
| 16. | Bearing | 2 | Tarnamid |
| 17. | O-ring | 3 | EPDM/NBR |
| 18. | O-ring | 1 | EPDM/NBR |
| 19. | Choke | 1 | Brass MO59 |
| 20. | Spindle | 1 | Stainless steel 2H13 |
| 21. | Allen screw | 1 | Galvanized steel 8.8 class/ Stainless steel A2 |
| 22. | Cap gasket | 2 | EPDM/NBR |
| 23. | Cap DN 100 | 1 | Aluminium AK11 |
| 24. | Cap cover DN 100 | 1 | EN-GJL-250/EN-GJS-500-7 AK11/Polyethylene |
| 25. | Reducer | 1 | EN-GJS-500-7 |

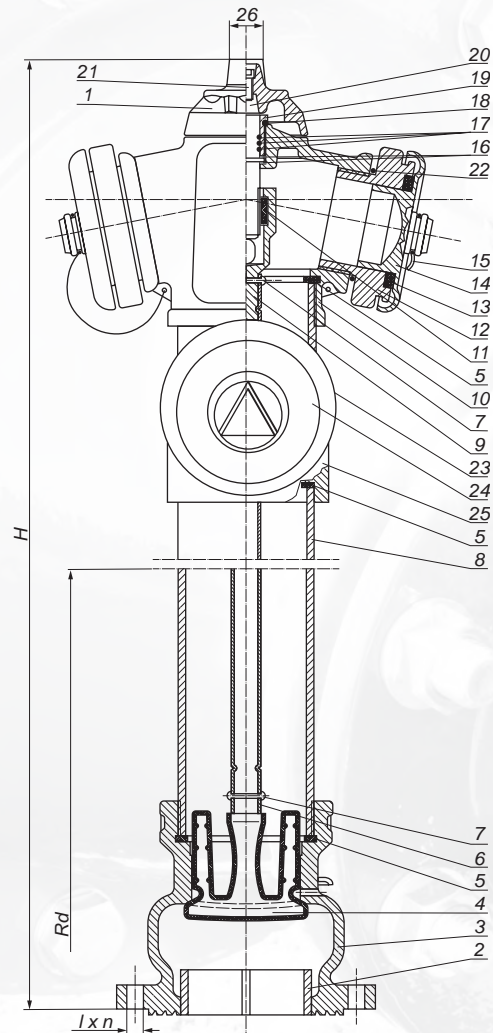

Overground hydrant with a nominal diameter of 100 mm for pressure 1,0 and 1,6 MPa with an automatic drainage device in the lower chamber. Intended for drawing water from a general-purpose pipeline with a nominal diameter of 100 mm, water at a temperature up to 70°C and a pressure of 1,0 and 1,6 MPa.

Certificate of conformity CNBOP 1438/CPR/0521
Coating: poliester paint UV resisted, min. 250 µm
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0/1,6 MPa, PN 10/16

| DN | Size | H | Rd | l | n | Weight |
|-----|------|--------------|------|----|---|--------|
| 100 | A | 1900 | 1250 | 18 | 8 | 39,00 |
| | B | 2150 | 1500 | 18 | 8 | 42,00 |
| | C | 2450 | 1800 | 18 | 8 | 46,00 |
| | X | as per order | | | | |