


RRPE coupling ductile iron PN 10/16 with brass insert for PE and PVC pipes

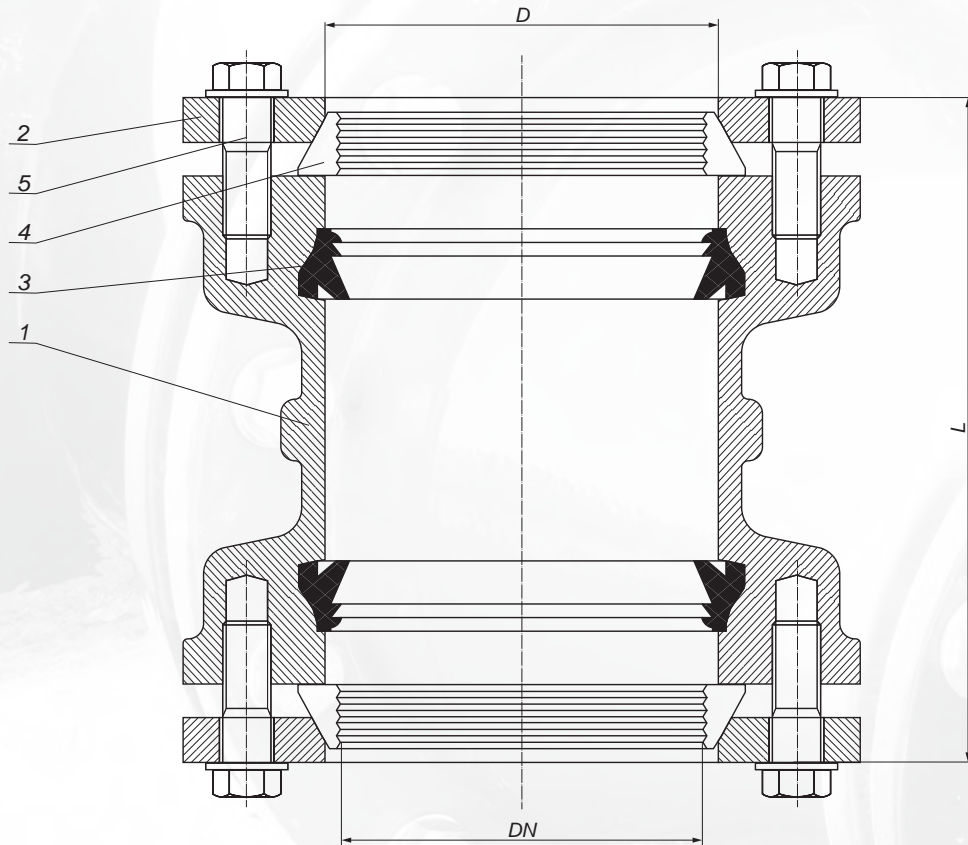

It is used to connect PE and PVC pipes.
It has brass protections before sliding the pipes out of the fitting.

Coating: poliester paint min. 250 μ m
Nominal pressure: 1,0/1,6 MPa; PN 10/16

No.	Description	Material
1.	Body	EN-GJS-500-7
2.	Ring	EN-GJS-500-7
3.	Gasket	EPDM/NBR
4.	Protection ring	Brass MO59
5.	Screw, pad	Stainless steel A2

DN	L	D	Weight
63	163	65	4,00
90	175	92	5,40
110	175	112	6,70
125	183	127	8,20
140	188	142	9,60
160	212	162	12,40
180	222	183	15,00
200	242	203	19,00
225	262	223	21,00
250	282	253	30,00
280	306	283	35,00
315	326	318	40,00