


Double flanged pipe FF PN 10 and ductile iron PN 10/16

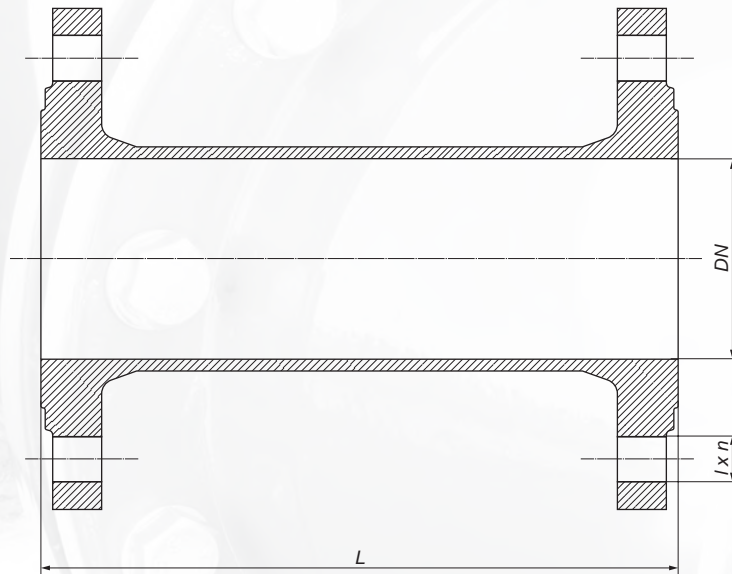

It is used to connect flanged fittings.

Coating: bitumen paint,
poliester paint min. 250 μm
Material: cast iron EN-GJL-250, PN-EN 1561:2012
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0 MPa; PN 10

Coating: poliester paint min. 250 μm
Material: ductile iron, EN-GJS-500-7, PN-EN 1563:2018
Flange connection: PN-EN 1092-2:1999
Nominal pressure: 1,0/1,6 MPa; PN 10/16

| DN | L | l | n | Weight | |
|-----|---|----|------|--------|-----------|
| | | | | L-500 | +/-100 mm |
| 80 | 100, 200, 300, 400, 500, 600, 800, 1000 | 18 | 4(8) | 16,00 | 0,90 |
| 100 | | 18 | 8 | 20,00 | 1,50 |
| 150 | | 22 | 8 | 28,00 | 3,20 |

| DN | L | l | n | Weight: | |
|-----|---------------------|--------|-------|---------|-----------|
| | | | | L-500 | +/-100 mm |
| 50 | 200, 300, 400, 500 | 18 | 4 | 11,00 | 0,90 |
| 65 | | 18 | 4 | 11,90 | 1,00 |
| 80 | 100, 200, 300, 400, | 18 | 8 | 13,40 | 1,60 |
| 100 | 500, 600, 800, 1000 | 18 | 8 | 16,50 | 1,80 |
| 125 | 200, 300, 400, 500 | 18 | 8 | 22,30 | 2,60 |
| 150 | 100, 200, 300, 400, | 22 | 8 | 24,00 | 3,00 |
| 200 | 500, 600, 800, 1000 | 22 | 8(12) | 37,50 | 4,50 |
| 250 | 300, 400, 500, 1000 | 22(26) | 12 | 51,50 | 6,00 |
| 300 | | 22(26) | 12 | 64,50 | 6,50 |

Possibility to make length L according to the order.

Lengths over 500 mm - ductile iron pipe
EN-GJS-500-7, PN-EN 1563:2018
and flange EN-GJL-250, PN-EN 1561:2012
or EN-GJS-500-7, PN-EN 1563:2018

Monolithic casting up to length L - 1000.